


SUSPENDER / TECHO
LINEA PROFESIONAL



iLumileds® ilumileds.com.mx

- PA1911P100WWAC** [(Blanco cálido) 1 m]
PA1911P100WNAC [(Blanco neutro) 1 m]
PA1911P100WAC [(Blanco) 1 m]
PA1911P150WWAC [(Blanco cálido) 1.5 m]
PA1911P150WNAC [(Blanco neutro) 1.5 m]
PA1911P150WAC [(Blanco) 1.5 m]
PA1911P200WWAC [(Blanco cálido) 2 m]
PA1911P200WNAC [(Blanco neutro) 2 m]
PA1911P200WAC [(Blanco) 2 m]

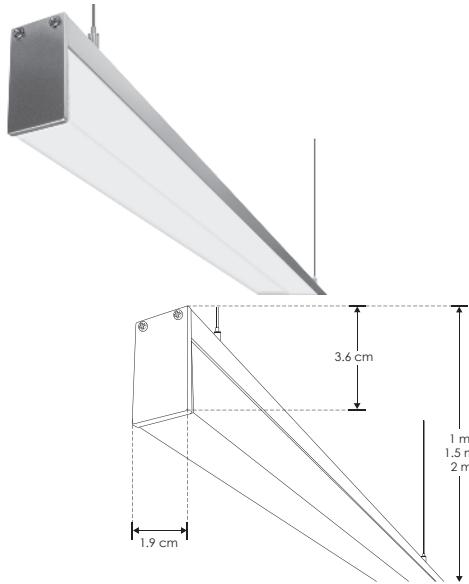

Material Aluminio / Difusor de policarbonato

Lámpara Luminario con tarjeta PCB. No requiere driver externo. Incluye soportes, cable de acero y alimentación de 2 m de largo

Ángulo de apertura 120°

Color de luz Blanco cálido / Blanco neutro / Blanco

Alimentación 127 V ca

Potencia 28.8 W (1 m) / 43.2 W (1.5 m) / 57.6 W (2 m)

Nota: Producto DOB, controlador y fuente luminosa comparten la misma placa, sensible a variaciones de voltaje o corriente, consulte manual de operación.